



Grease for high speed - GREASE GS2

√ **Excellent sealing performance**, effectively preventing the intrusion of contaminants.

√ **Outstanding water resistance and anti-corrosion/anti-rust capability**. It has passed extremely demanding test conditions and maintains exceptional performance even in the presence of saltwater, effectively preventing damage to mechanical components and bearings caused by rust and corrosion.

√ **Excellent mechanical stability and oxidation resistance**, giving the grease exceptional long-term durability.

√ **Remarkable high- and low-temperature stability**, maintaining its superior performance even under large temperature fluctuations.

✓ **Outstanding friction-reducing properties**, effectively reducing vibration and lowering noise, thereby extending the service life of components and bearings.

✓ **Suitable for high-speed bearing lubrication.**

Introduction


GS2 is an adhesive, lithium soap based lubricating grease designed for long-term application. Suitable for high speed operation.

Properties

- **NLGI-grade:** 2
- **Dropping point:** 180°C
- **Worked penetration(Pw 60):** 265~295 (1/10mm)
- **Temperature range:** -40°C~140°C
- **Net.**80g

Grease gun LG80

LG80 : Grease gun for GS2.

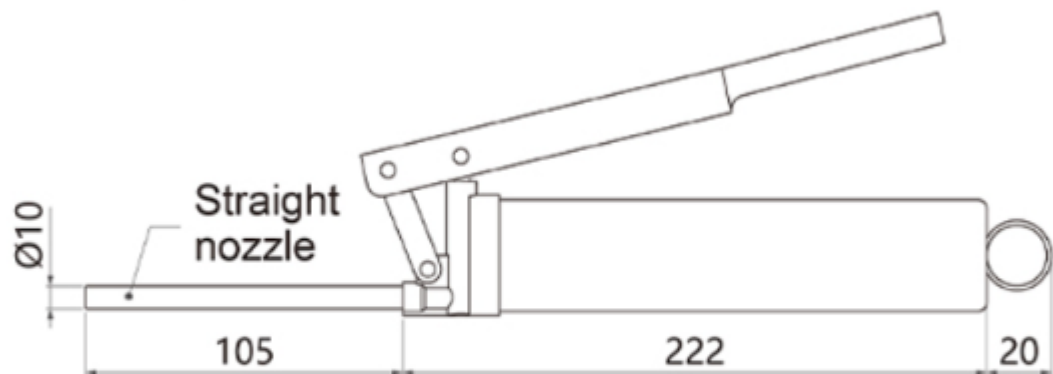

1. Discharge pressure: 300kg/cm^2
2. Weight (excluding the grease) : 0.5kg
3. Grease: 80g in a bellows tube